



Fire Alarm Systems Manuel Call Points* **USER'S GUIDE**

Efire-EYIB
Fire Alarm
Button

Efire-EYIB-Nc/No
Fire Alarm
Button (Dry Contact)

**WARNING: PLEASE READ THESE INSTRUCTION CAREFULLY
PRIOR TO OPERATING OR COMMISSIONING THIS DEVICE**

*Conventional Manual Call Points according to the EN 54-11

1. Usage Purpose


It is used to activate the system manually in order to trigger a fire alarm or to test the system.
It can be applied indoor.
It is activated by breaking the button glass via the energy line or contact output, which supplies power to the LED indicator and to the fire alarm system or the extinguishing system.
Beside this, it is also recognized that the system is in alarm condition by the dislocated glass.

2. Technical Specifications

Product Code	Efire-EYIB	Efire-EYIB-Nc/No
Product Type / Category	Type A / Indoor Area	
Activation Signal	Red LED	-
Alarm Resistance	470 Ω	Max 0.5A
Operating Voltage	12 / 24 VDC	(12-24)VDC / (110-230)VAC
Relative Humidity (Max.)	95 %	
Temperature	(-10) - (55)°C	
Weight	121 g	
Dimensions	87x86x56 mm	

3. Mounting Instructions

- Connect the cables coming from the line to + and – on the contactor for the **Efire-EYIB**.
- Perform the Nc and/or No connections respectively for **Efire-EYIB-Nc/No**.
- When a button protective cover is intended to be used, mount it on the upper casing.
- Mount the upper casing on the lower casing.

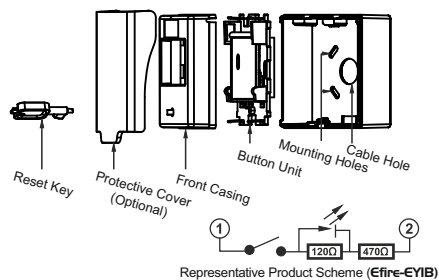

4. Warnings

- Pay attention to the specific mounting schemes of **Efire-EYIB** and **Efire-EYIB-Nc/No**.
- Don't supply anything except 12/24 V DC to **Efire-EYIB**.
- Never make any connection above 1 A to the product **Efire-EYIB-Nc/No**.
- When a protective cover is being used, the cover needs to be lifted in order to set the button into alarm.
- Don't touch with wet hands.
- Protect it against falling and impacts.
- It is recommended not to use the product at locations with intensive materials, possible to cause any corrosion.
- The warranty term is 2 (two) years.
- The product usage life term is 7 years.

AUTHORIZED SERVICE

MANUFACTURER COMPANY / Central Service

TITLE : ELEKS Elektrik Elektronik Sistemleri
Sanayi Ve Ticaret Limited Sirketi

ADDRESS: Şerifali Mah. Bayraktar Bulvarı
Emin Sok. No:3 Yukarı
Dudullu - Ümraniye / İSTANBUL

PHONE : +90 0216 463 47 28 - 29 - 30

FAX : +90 0216 463 47 31

E-Mail : eleks@eleksyangin.com

Web : www.eleksyangin.com



16
1922-CPR-0259
EN 54-11

TS EN 54-11
Manual Call Point

Efire-EYIB
DOP Number: ELEKS-014.00
Efire-EYIB-Nc/No
DOP Number: ELEKS-015.00